

10Gb/s 80km SFP+ Optical Transceiver Module

CC-PII448L-xD

Features

- Hot Pluggable
- LC Duplex optical interface
- 1550nm cooled EML transmitter, APD receiver
- Support up to 11.3G bit rates
- Low power consumption<2W
- Up to 80km SMF length
- All-metal housing for superior EMI performance
- Cost effective SFP+ solution, enables higher port densities and greater bandwidth
- RoHS compliant (lead free)
- Operating case temperature

Commercial: 0 to 70 °C

Industrial: -40 to 85 °C

Applications

- 10G Ethernet
- 8.5G/10G Fiber Channel
- 10G SONET/SDH, OTU2/2e

Standards

- SFF-8431/SFF-8472
- SFF-8432

Description

This 1550nm cooled EML 10Gbps SFP+ transceiver is designed to transmit and receive optical data in 10G Ethernet links over single mode optical fiber up to 80km.

The SFP+ 80km module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI.

China Cloud Electro Optics Technology Co., Ltd.

3rd Floor, Block B, Building 16, Yangfan Road ,Zibo High-Tech Zone, Shandong, 255000 China

TEL: +86-533-2079888 FAX: +86-533-8171188

www.cceo.cc

10Gb/s 80km SFP+ Optical Transceiver Module

CC-PII448L-xD

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit
Power Supply Voltage	V _{CC}	-0.5		4	V
Storage Temperature Range	T _s	-40		85	°C
Relative Humidity - Storage	RH _s	0		95	%
Relative Humidity - Operating	RH _o	0		85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Case Operating Temperature Range	T _c	0	-	70	°C
		-40	-	85	
Power Supply Voltage	V _{CC}	3.14	3.3	3.46	V
Supply Current	I _{CC}	-	-	600	mA
Data Rate	BR	-	10.3125	11.3	Gbps

Electrical Characteristics

Transmitter Electrical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Differential Input Voltage Swing	V _{IN}	180	-	700	mV
Tx Differential Input Impedance	Z _{IN}	-	100	-	Ω
Transmitter Disable Voltage	V _{DIS}	2.0	-	V _{CC} +0.3	V
Transmitter Enable Voltage	V _{EN}	0	-	0.8	V
T _{FAULT} Logic High	V _{TFH}	2.4	-	V _{CC}	V
T _{FAULT} Logic Low	V _{TFL}	V _{EE}	-	V _{EE} +0.4	V
Receiver Electrical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Differential output Voltage Swing	V _{OUT}	300	-	850	mV
Rx Differential Output Impedance	Z _{OUT}	-	100	-	Ω
LOS Assert Voltage	V _{LOSA}	2.4	-	V _{CC}	V
LOS De-assert Voltage	V _{LOSD}	V _{EE}	-	V _{EE} +0.4	V

China Cloud Electro Optics Technology Co., Ltd.

3rd Floor, Block B, Building 16, Yangfan Road, Zibo High-Tech Zone, Shandong, 255000 China

TEL: +86-533-2079888 FAX: +86-533-8171188

www.cceo.cc

10Gb/s 80km SFP+ Optical Transceiver Module

CC-PII448L-xD


Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Transmitter Characteristics						
Laser Type		EML				
Center Wavelength Range	λ	1530	1550	1565	nm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Launch Optical Power	P _{out}	-1	-	5	dBm	1
Average launch power of OFF transmitter	P _{OFF}	-	-	-30	dBm	
Extinction Ratio	ER	8.2	-	-	dB	
Transmitter and dispersion penalty	TDP	-	-	3	dB	
Relative Intensity Noise	RIN	-	-	-128	dB/Hz	
Receiver Characteristics						
Receiver Type		APD				
Operating Central Wavelength	λ	1260	-	1610	nm	
Receiver Sensitivity	Sen	-	-	-23	dBm	2
Receiver Overload	P _{SAT}	-7	-	-	dBm	
Receiver Reflectance	RFL	-	-	-27	dB	
LOS Assert	LOSA	-35	-	-	dBm	
LOS De-Assert	LOSD	-	-	-26	dBm	
LOS Hysteresis	LOSH	0.5			dB	
Notes						
1. Average power figures are informative only, per IEEE 802.3ae. 2. Measured with 2 ³¹ -1 PRBS@10.3125Gbps, BER<10 ⁻¹²						

10Gb/s 80km SFP+ Optical Transceiver Module

CC-PII448L-xD

Pin Definitions

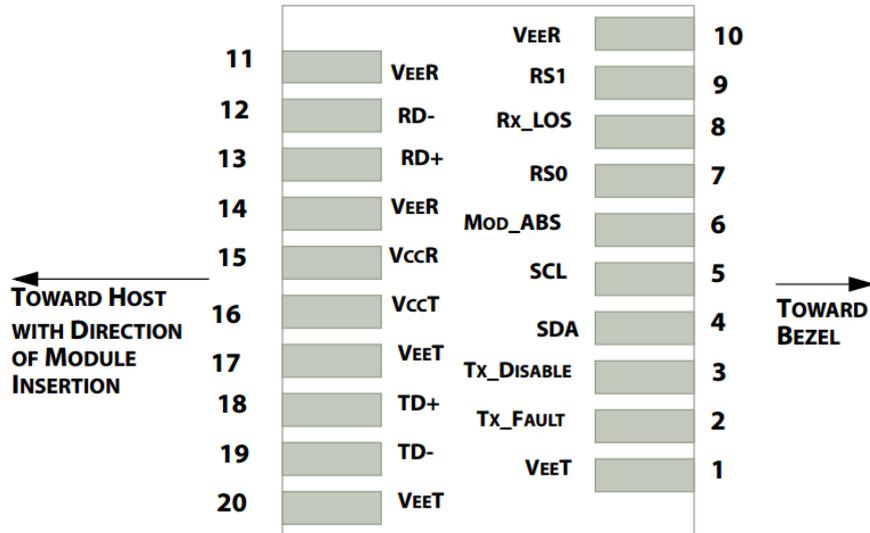

Pin	Symbol	Description	Notes
1	V _{EET}	Transmitter Ground	1
2	T _{FAULT}	Transmitter Fault	2
3	T _{DIS}	Transmitter Disable. Laser output disabled on high or open	3
4	SDA	2-wire Serial Interface Data Line	2
5	SCL	2-wire Serial Interface Clock Line	2
6	MOD_ABS	Module Absent. Grounded within the module	
7	RS0	Rate Select 0. Not Used.	4
8	RX_LOS	Loss of Signal indication. Logic 0 indicates normal operation	2
9	RS1	Rate Select 1. Not Used.	4
10	V _{EER}	Receiver Ground	1
11	V _{EER}	Receiver Ground	1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	V _{EER}	Receiver Ground	1
15	V _{CCR}	Receiver Power Supply	
16	V _{CCT}	Transmitter Power Supply	
17	V _{EET}	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V _{EET}	Transmitter Ground	1

Notes

1. Circuit ground is internally isolated from chassis ground.
2. Shall be pulled up with 4.7k-10k Ohms to a voltage between 3.15V and 3.6V on the host board.
3. Laser output disabled on T_{DIS} >2.0V or open, enabled on T_{DIS} <0.8V.
4. Internally pulled down per SFF-8431 Rev 4.1.

China Cloud Electro Optics Technology Co., Ltd.

3rd Floor, Block B, Building 16, Yangfan Road, Zibo High-Tech Zone, Shandong, 255000 China


TEL: +86-533-2079888 FAX: +86-533-8171188

www.cceo.cc

10Gb/s 80km SFP+ Optical Transceiver Module

CC-PII448L-xD

Recommended Interface Circuit

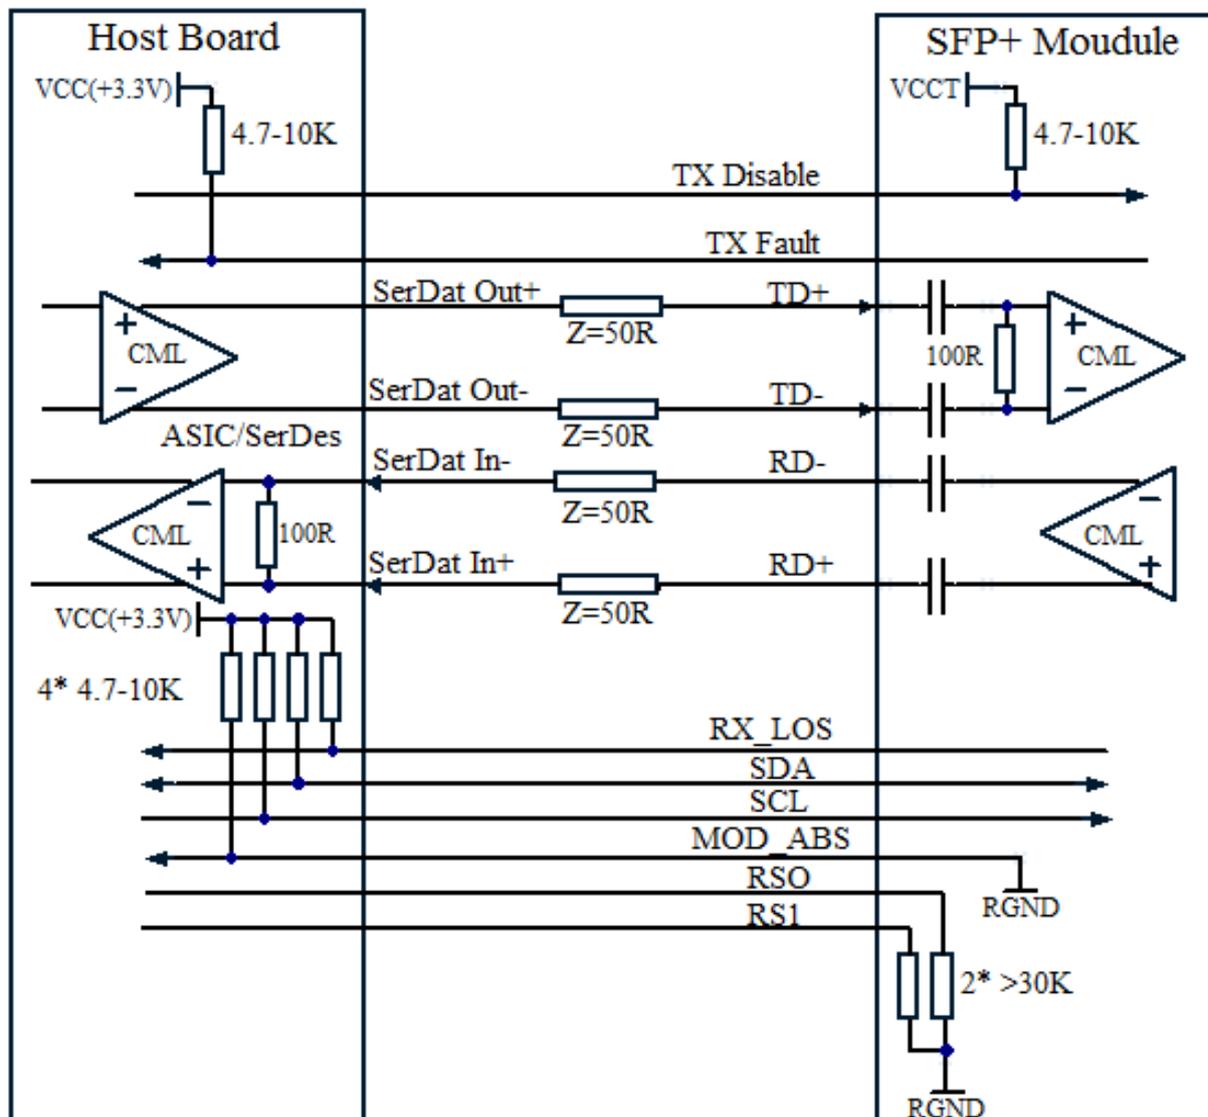


10Gb/s 80km SFP+ Optical Transceiver Module


CC-PII448L-xD

Recommended Host Board Supply Filtering Circuit

The Transceiver includes internal circuit components to filter power supply noise. Under some conditions of EMI and power supply noise, external power supply filtering may be necessary. If receiver sensitivity is found to be degraded by power supply noise, the filter network illustrated in the following figure may be used to improve performance. The values of the filter components are general recommendations and may be changed to suit a particular system environment. Shielded inductors are recommended.

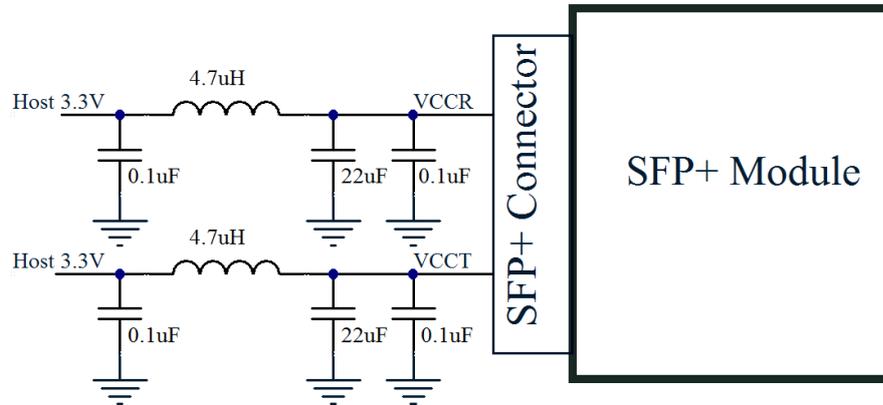

Mechanical Dimensions (Unit: mm)

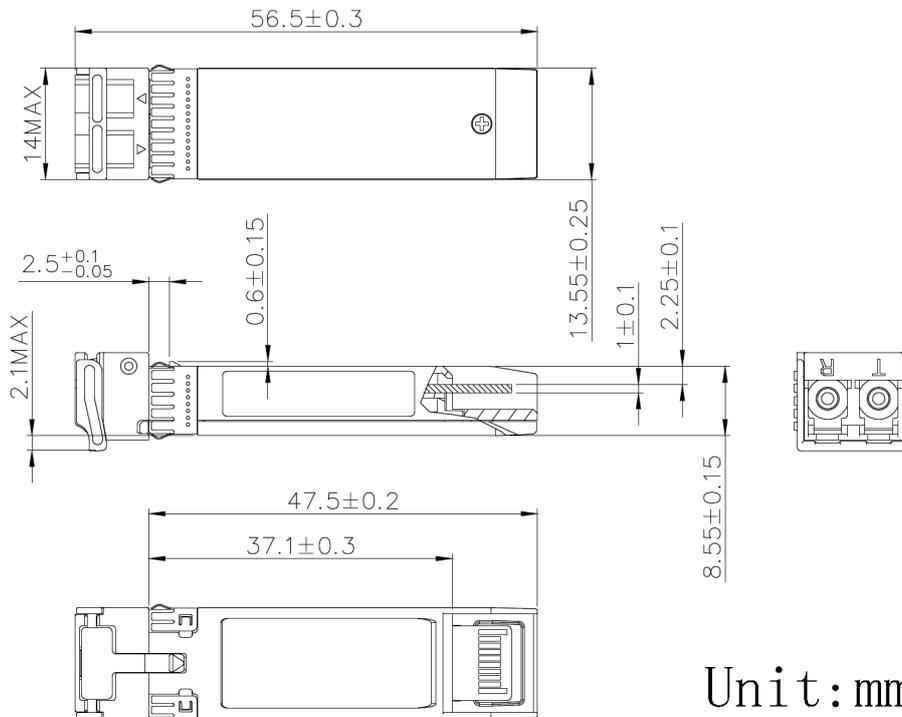

Unit: mm

10Gb/s 80km SFP+ Optical Transceiver Module

CC-P1I448L-xD

Ordering information

Part Number	Product Description
CC-P1I448L-SD	SFP+, 10.3125Gbps, 1550nm, SM, 80km, 0°C~+70°C, With DDM
CC-P1I448L-ID	SFP+, 10.3125Gbps, 1550nm, SM, 80km, -40°C~+85°C, With DDM

Regulatory Compliance

Ccloud's transceiver is designed to be Class 1 Laser safety compliant and is certified per the following standards.

Agency	Standard	Certificate /Comments
ISO9001	GB/T 19001-2016/ISO 9001:2015	SW21Q20855R1M
ISO14001	ISO 14001:2015	SW19E20246ROS
UL	UL 60950-1 CAN/CSA C22.2 No. 60950-1-07	20170123-E489408
TUV-MARK	IEC62368_1B	No.B 110644 0001 Rev.00
CE-EMC	EN 60825-1:2014,EN 60825-2:2004+A2:2010(LVD)	M:2018.201.N6868 AE 50372175 0001
	EN 55032: 2015 EN 55024: 2010+A1	
REACH	REACH 211	AGC 10204210401-001
FCC	FCC Rules and Regulations Part 15 Subpart B Class B	MTi190422E141C
RoHS	2011/65/EU and amendment (EU) 2015/863	68.420..21.1117.01

China Cloud Electro Optics Technology Co., Ltd.

3rd Floor, Block B, Building 16, Yangfan Road ,Zibo High-Tech Zone, Shandong, 255000 China

TEL: +86-533-2079888 FAX: +86-533-8171188

www.cceo.cc

